

ELMARK[®]

The Brand of Electricity

FIRE ALARM FA-01




GENERAL INFORMATION »

- ∴ Working voltage: 230V AC 50/60Hz; 24V DC
- ∴ Max. current: 5A 230V AC 50/60Hz; 8A 24V DC
- ∴ Contact Resistance: $\leq 0.1\Omega$
- ∴ Working conditions: temp. -10°C ~ $+50^{\circ}\text{C}$; max. relative humidity $\leq 93\pm 2\%$
- ∴ Colour: Red
- ∴ Material: Plastic

FEATURES »

It is used for artificial start in the system of self-motion conflagration. Eyewitness only need to break face - plate glass of conflagration button in strength. Then can make conflagration signal sending to the controller and give out the part of conflagration. At one time, can use to start conflagration equipment of message indicator, alarm bells straightly, etc.

DIMENSIONS »

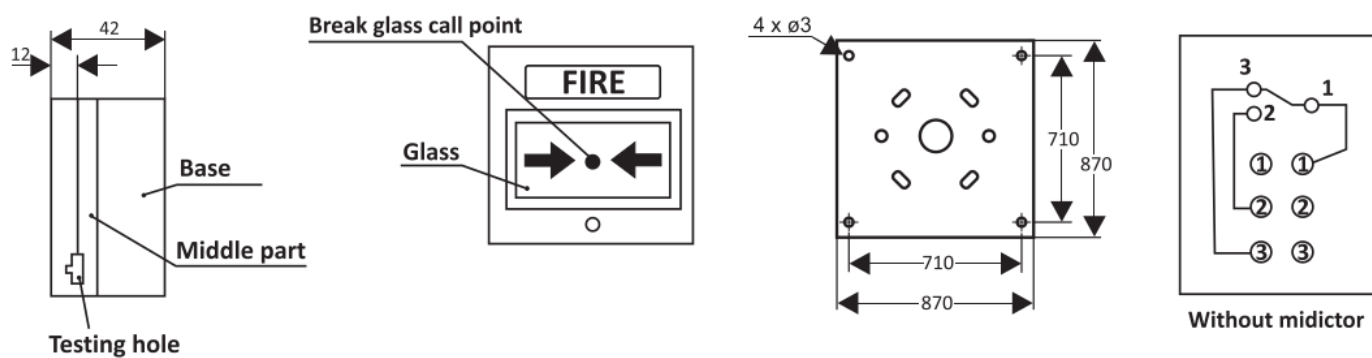

PRODUCT DETAILS »

Type	Description	Voltage (V)	Sound level (dB)	Catalogue number
FA-01	fire alarm	230	120	401540

ADDITIONAL INFORMATION »

Catalogue number	Barcode	Packing (pcs) / carton
401540	3800131126429	1/100

