


LAMP PHOTOMETRIC REPORT

MODEL: 99PFMI30/BL		
POWER: 10W	VOLTAGE: 230V	WORKING VOLTAGE: 230V
MANUFACTURER: Elmark Industries JSC		

TOTAL FLUX: 817.05 lm

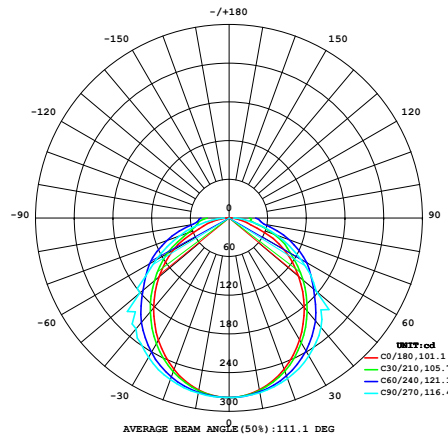

γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%
10	270.7	272.7	275.1	272.9	271.1	273.4	275.9	273.5	0- 10	26.33	26.33	3.22
20	249.4	256.5	265.0	257.1	250.0	257.9	266.8	258.2	10- 20	75.22	101.5	12.4
30	218.5	230.7	247.3	231.8	219.2	232.8	249.9	233.4	20- 30	113.5	215.0	26.3
40	181.4	197.4	221.6	198.8	182.4	200.1	224.5	200.9	30- 40	136.2	351.3	43
50	140.9	160.1	176.1	161.5	142.1	162.9	180.6	164.2	40- 50	140.7	491.9	60.2
60	98.95	128.1	128.5	130.5	100.1	130.3	131.4	132.6	50- 60	126.9	618.8	75.7
70	46.73	88.69	79.81	91.47	49.91	89.91	82.69	93.04	60- 70	100.8	719.6	88.1
80	17.17	46.77	35.24	48.78	19.46	43.47	37.44	45.00	70- 80	62.97	782.6	95.8
90	0.6882	24.61	6.725	24.50	0.6556	27.92	7.128	26.93	80- 90	34.48	817.0	100
100									90-100			
110									100-110			
120									110-120			
130									120-130			
140									130-140			
150									140-150			
160									150-160			
170									160-170			
180									170-180			
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
C Interval: 10.0DEG
Test Speed: HIGH
Temperature:25.3°C
Operators:
Test Date:17 November 2022

γ Range: 0 - 90DEG
 γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```

γ Range: 0 - 90DEG
γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```

```

γ Range: 0 - 90DEG
γ Interval: 2.5DEG
Test System:EVERFINE GO-2000A_V1 SYSTEM V2.00.456
Humidity:65.0%
Test Distance:6.265m [K=1.0000]
Remarks:

```